WOOD 🛞 STONE



Left-Hand drive configuration with six spits and optional Charbroiler shown.

FEATURES

- High Production
- Durable Construction
- Rear Load and Unload
- 6 or 10 Spit Options (6 Spit Shown)

GUIDE TO MODEL NUMBERS

- Standard or Narrow Widths Available
- Custom Accessories
- Unique Flavor Profiles

MT. OLYMPUS solid fuel rotisserie with optional charbroiler



Job Name Model

ltem#

odel WS-SFR-(6, 10)-BROILER	
-----------------------------	--

The body of the Mt. Olympus Rotisserie is constructed of 16-gauge polished stainless steel. It comes with a durable, high-temperature ceramic firebox and when ordered with the optional extended firebox Charbroiler includes seven 6 x 24-inch cast iron grates (five grates for narrow models). The rotisserie is powered by 1/4 HP, variable speed, DC motor with soft start and stop, matched with a robust two-stage gearbox.

The 6 spit unit is standard. Each spit is 44 inches long (32 inches long for narrow models), giving the rotisserie a capacity of 36–42 chickens (18–24 for narrow models). The optional 10 spit model, with all 10 spits in place, is suitable only for chicken and has a capacity of 60–70 birds. The controller and motor can be located on either side of the unit—this must be specified at the time of order. The Mt. Olympus is easily serviced via an access panel located on the controller side of the unit. A 6.5-cubic foot stainless steel Wood Handling Cart is provided with each rotisserie for easy wood storage below. Additionally, a grease receptacle, Particle Shovel, Grate Tool and T-Style Brass-Bristled Brush is also included.

The unit is ETL Listed and is made in the USA. Information about additional tools and accessories can be found online at: woodstone-corp.com.





WS-SFR-6-BROILER



WS-SFR-6N-BROILER

REVISED: SUMMER 2022

An ongoing program of product improvement may require us to change specifications without notice.



WO-DI R-OIN-BRUILER X



t. 360.650.1111 tf. 800.988.8103 f. 360.650.1166 Wood Stone Corporation 1801 W. Bakerview Rd. Bellingham, WA 98226 USA info@woodstone-corp.com woodstone-corp.com




MT. OLYMPUS solid fuel rotisserie with optional charbroiler • ws-sfr-#-broiler

Note: The drive side is determined from the rear of the unit and can be installed on either side of the unit. The right-hand drive model mirrors the left-hand drive model (shown below) exactly. Drive side must be specified at the time of order.

This unit is on casters. Service access is from the side panels—both sides must be accessible for service.

*Drawings are of a 6 spit model with a left-hand drive.



GUIDE TO MODEL NUMBERS


MODEL	Units	А	В	С	D	E	F	Ship Weight
WS-SFR-6- BROILER	inches	62	47	47	23	69.75	26.75	2,900 lb
	mm	1575	1194	1194	584	1772	679	1,315 kg
WS-SFR-6N- BROILER	inches	50	35	35	17	69.75	26.75	2,900 lb
	mm	1270	889	889	432	1772	679	1,315 kg

FRONT VIEW



REAR VIEW (DRIVE SIDE)

Left-hand drive configuration shown.

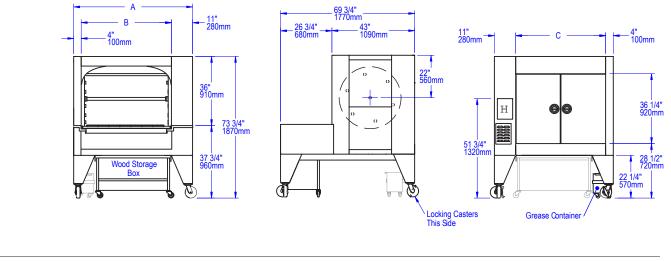

Wood Stone Corporation

info@woodstone-corp.com

Bellingham, WA 98226 USA

1801 W. Bakerview Rd.

woodstone-corp.com

UTILITIES SPECIFICATIONS

Intertek

ANGL/NGE

GAS N/A

Intertek

Н

+ GD

Œ

Grease Drain Cord with

NEMA 5-15

Plug

ELECTRICAL 120 VAC, 2.5 A, 60 Hz NEMA 5-15 plug. Unit plugs into a standard 120 VAC, 15 A outlet.

t. 360.650.1111

tf. 800.988.8103

f. 360.650.1166

VENTING INFORMATION

The WS-SFR-# must be vented using a Listed Type 1 exhaust hood, or one constructed in accordance with NFPA 96 and all relevant local and national codes. The rotisserie must be vented as a solid fuel appliance, in accordance with all relevant local and national codes, and in a manner acceptable to the authority having jurisdiction.

Ship Weight: See table above

REVISED: SUMMER 2022 An ongoing program of product improvement may require us to change specifications without notice.

