WOOD (STONE



WS-GVR-CT model shown.

FEATURES

- · Unique Vertical Roasting
- · No Cross-Contamination
- · Cooks up to 25 lbs. per Spit
- Medium–High Production in Small Footprint
- Models Available: 6 or 10 Spit (specify at time of order)
- Standing Model Available
- Custom Accessories
- Beautiful Live Flame
- Optional Rear Door Available



Optional Rear Door (rear view) model shown.





Job Name

Model

WS-GVR-(6, 10)-CT

Item#

The unique design of the Whatcom Gas Vertical Rotisserie (GVR) allows different foods to be cooked at the same time, in the same rotisserie, without exchanging flavors (cross-contamination). The GVR can be order with 6 or 10 spit locations (stations), allowing a large variety of products to be cooked simultaneously.

The rotisserie comes standard with a tempered glass front door, allowing the cooking process to be fully visible to chefs and customers alike. The cabinet of the GVR is constructed of polished stainless steel and is front-loading only. A water bath and drain facilitate simple and safe cleaning by connecting to a water line and drain line provided with a grease trap. The 4" curb wall is removeable for cleaning.

The GVR is also available in its standard configuration on legs, equipped with heavy-duty, non-marking locking casters to easily roll into an existing cook line under a Listed Type 1 exhaust hood.

The GVR is powered by three gas burners: two infrared (IR) burners (in the front corners of the cabinet and the primary heat source), and a post of live flame, located in the center of the unit. The IR burners operate on an adjustable cycle timer (10 minute cycles) or can be turned off completely so that the rotisserie is heated by the center flame post alone. The drum of the rotisserie turns at a speed of 1.5 revolutions per minute. Each spit connection (or station) rotates approximately 6.5 times during one revolution of the drum. A jog feature allows for safe loading and unloading.

Choose the accessory package that compliments your Menu. Chicken, Rib, and Various other Proteins, as well as Vegetable packages, are available.

The unit arrives completely assembled, ETL Listed, ready to install and is made in the USA. Information about additional tools and accessories can be found online at: woodstone-corp.com.






t. 360.650.1111 tf. 800.988.8103 f. 360.650.1166 Wood Stone Corporation 1801 W. Bakerview Rd. Bellingham, WA 98226 USA info@woodstone-corp.com woodstone-corp.com REVISED: WINTER 2023

An ongoing program of product improvement may require us to change specifications without notice.





Note: We recommend "quick disconnects" and flexible connections.

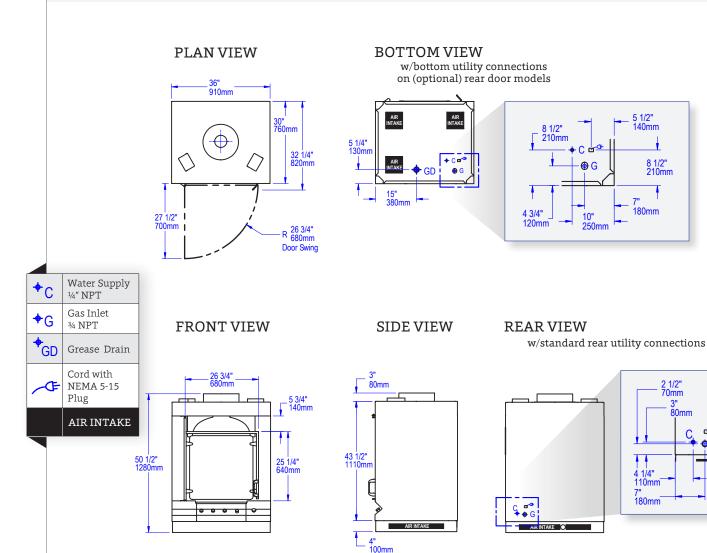

UTILITIES SPECIFICATIONS

GAS

34 inch gas inlet (FNPT)

115,000 BTU/hr - Natural Gas (NG)

115,000 BTU/hr - Propane (LP)

WATER

Provide incoming water supply equipped with a 1/4" NPT fitting.

ELECTRICAL

120 VAC, 1.3 A, 60 Hz

NEMA 5-15 plug. Unit plugs into a standard 120 VAC, 15 A outlet.

DRAIN

Provide connection to floor sink (grease trap) equipped with a 11/2" slip-fit NPT fitting.

VENTING INFORMATION

The WS-GVR-(6, 10)-CT must be vented using a Listed Type 1 exhaust hood, or one constructed in accordance with NFPA 96 and all relevant local and national codes. The rotisserie must be vented in accordance with all relevant local and national codes, and in a manner acceptable to the authority having jurisdiction.

Ship Weight: 600 lbs / 272 kg





t. 360.650.1111

tf. 800.988.8103 f. 360.650.1166

Wood Stone Corporation 1801 W. Bakerview Rd. Bellingham, WA 98226 USA info@woodstone-corp.com woodstone-corp.com

REVISED: WINTER 2023

An ongoing program of product improvement may require us to change specifications without notice.

